



### *The Cabinet Softmount Features:*

- Industrial springs and shock absorbers deliver exceptional stability in handling the highest extract speeds and further build on the already strong I-frame construction.
- A stainless steel shaft, heavy-duty bearings and axial steel tub ring ensure long-lasting durability.
- Because no concrete pads or special footings are needed, installation costs are low, making it the perfect replacement washer.
- An extra-large stainless steel door, with a rugged hinge and handle, stands up to the repeated use of a heavy-volume laundry.
- A dependable door interlock ensures the machine only operates after the door is closed and locked. The secure design represents outstanding strength, reliability and safety.
- Steel cabinet, washtub and cylinder make keeping the washer clean easy and contribute to its long-lasting construction.

### EXCEPTIONAL CHOICES

For more than half a century, Cissell has been an industry leader in the design and innovation of laundry equipment. Our unwavering commitment to building durable, reliable and affordable equipment has resulted in *Exceptional Choices* for our customers. No other brand can provide you with as broad a product range combined with outstanding quality, reliability, technical support and dependable distributors.


Cissell's softmount washer-extractors are recognized worldwide for producing superior results and maximum productivity. When you put Cissell in your laundry, you are choosing products that will stand up to the toughest demands. When you select one of our softmount models, you'll receive top quality results with every cycle. Our high-performance laundry equipment is built to give you complete control to tailor each wash to the specific requirements of the individual load. In addition, the large capacity range of our washers ensures there's a size to meet your unique needs. *Exceptional Choices* — it's what makes Cissell the best overall value for your laundry.

### EXCEPTIONAL INNOVATION

Cissell's SmartSpin™ technology can make an immediate positive impact on the efficiency of your laundry operation.

#### *The Washer-Extractor Features:*

- Ultra-high speed extraction of up to 383 G-Force reduces drying time and helps laundries increase throughput.
- An inverter drive enables the machine to gradually ramp up to its high extraction speeds easing wear and tear on components.
- Automatic spin adjustment, which detects an out-of-balance load and adjusts the RPM to maximize the G-Force.

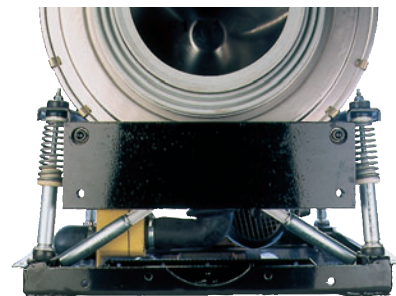


## EXCEPTIONAL CONTROL

Cissell's softmount washer-extractors are equipped with versatile microprocessor controls. These controls can help you realize greater energy savings through their efficient designs.


### The Micro 20 Control Features:

- Nine factory programmed cycles.
- 99 total programmable cycles, which give managers greater control of the wash process through setting wash cycles, spin speeds and water levels.

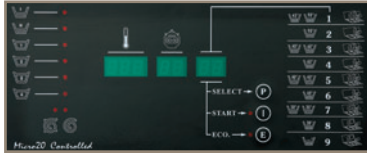

### The PS40 Control Features:

- Ten factory preprogrammed cycles.
- 40 additional programmable cycles, which give managers greater control of the wash process through setting wash cycles, spin speeds and water levels.



## EXCEPTIONAL VALUE

For more peace of mind, all Cissell washer-extractors come with an exceptional three-year warranty. We will cover any non-perishable part that fails due to defect in material or workmanship for three years from the date of installation. No one else gives you so many advantages with so much affordability.

## Specifications

	CHC018	CHC025	CHC035	CHF055	CHF075
Capacity - lb (kg)	18 (8.2)	25 (9.5)	35 (15.9)	55 (24.9)	75 (34.0)
Wash Speed - RPM	0-50	0-50	0-50	0-50	0-50
High Extract Speed - RPM	500-1000	500-1000	500-1000	500-1000	500-1000
Low Extract Speed - RPM	250-450	250-450	250-450	250-450	250-450
Maximum G-Force	296	296	380	419	475
Diameter - in (mm)	20 7/8" (530)	20 7/8" (530)	25 9/16" (650)	29 1/2" (750)	33 7/16" (850)
Depth - in (mm)	13" (330)	17 5/16" (440)	19 3/4" (500)	20 7/8" (530)	21 1/8" (537)
Volume - ft <sup>3</sup> (liters <sup>3</sup> )	2.68 (76)	3.35 (95)	5.83 (165)	8.26 (234)	10.74 (304)
Drain Outlet Size - in (mm)	2" (50)	2" (50)	2" (50)	3" (75)	3" (75)
Water Inlet - Connection Size	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT	3/4" NPT
Number of Inlets	3	3	3	3	3
Circuit Breaker** -					
200-240v/50-60/1-3ph	10	10	15	15	N/A
200-240v/50-60/3ph	10	10	15	20	20
380-415v/50-60/3ph	10	10	15	20	15
440-480v/50-60/3ph	10	10	15	20	15
Depth - in (mm)	31 5/16" (796)	35 1/4" (896)	39 1/4" (998)	34 3/4" (1010)	45 1/8" (1147)
Width - in (mm)	26" (660)	26" (660)	30 11/16" (780)	35 7/16" (900)	41 3/4" (1060)
Height - in (mm)	39 13/16" (1011)	39 13/16" (1011)	46 1/4" (1175)	59 1/16" (1500)	60" (1530)
Door Opening Diameter - in (mm)	11 13/16" (300)	11 13/16" (300)	11 13/16" (300)	15 3/4" (400)	15 12/16" (400)
Net Weight - lb (kg)	481 (218)	525 (238)	800 (363)	1177 (534)	1612 (731)
Shipping Weight - lb (kg)	514 (233)	564 (256)	844 (383)	1287 (584)	1722 (781)
Agency Approvals	ETL, cETL	ETL, cETL	ETL, cETL	ETL, cETL	ETL, cETL

\* Wash speed programmable if equipped with inverter drive and PS-40 Control.

\*\* Washers capable of 3 phase connection.

For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous improvements, design and specifications subject to change without notice. The quality management system of Alliance Laundry Systems' Ripon facility has been registered to ISO 9001:2000.

Printed in the U.S.A.



P.O. Box 990 • Ripon, WI • 54971-0990

888-223-2980

[www.cissellmfg.com](http://www.cissellmfg.com)